

# AIR SMART®


## AIR BARRIER SYSTEM®

AIR SMART®  
AIR BARRIER SYSTEM

TERMINATION BAR  
(RECOMMENDED)

FLASHING SYSTEM

DRIP PLATE  
(REQUIRED)

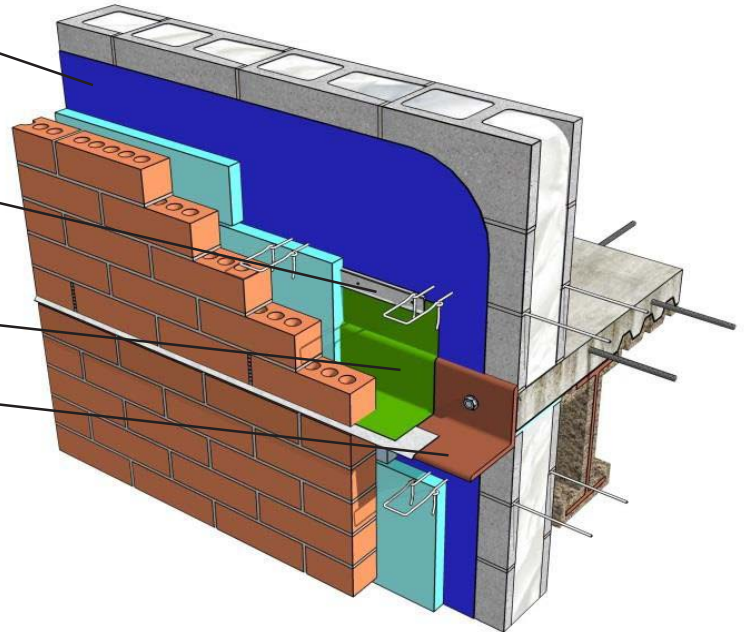

DRAWINGS FOR ILLUSTRATIVE PURPOSES ONLY

### AIR SMART® Vapor Permeable Air Barrier System

Single component, fluid applied, elastomeric membrane

#### Product Description:

- Elastomeric membrane for above grade wall assemblies
- Asphalt free formulation
- Vapor permeable
- Remains flexible over a wide temperature range
- Exceeds the highest industry standards for air barrier performance
- Maintains excellent adhesion on most construction materials
- Cost effective

#### Basic Uses:

AIR SMART® features an asphalt-free formulation and maintains excellent adhesion on most construction materials including exterior gypsum board, CMU, concrete, stone, metal and much more.

#### Application:

AIR SMART® must be applied to a surface that is free from all foreign matter. This material should remain dry until it has cured. AIR SMART™, can be brushed, rolled, or sprayed; and should only be applied to above grade wall assemblies. Visit [masonryfoamsandcoatings.com](http://masonryfoamsandcoatings.com) for detailed instructions.

<b>Color:</b>	Light Blue
<b>Coverage Rate:</b>	40 ft <sup>2</sup> per gallon (40 mil wet film)
<b>Chemistry:</b>	Acrylic
<b>Permeance:</b>	11.5 perms
<b>Exposure:</b>	Up to 6 months
<b>Application Temperature:</b>	40° – 120° F
<b>Recyclables By Weight:</b>	25%
<b>Dry Time:</b>	
<b>Tack Free:</b>	4 - 6 hours
<b>Recoat:</b>	24 hours
<b>Testing:</b>	ASTM E2178, ASTM E96, ASTM E2357, EPA 24
<input type="checkbox"/>	5 Gallon Pail
<input type="checkbox"/>	55 Gallon Drum

## MASONRY FOAMS & COATINGS

A Division of cfiFOAM, Inc.  
P.O. Box 10393 /Knoxville, TN 37939  
800-656-FOAM (3626)  
FAX: 865-588-4465  
[www.masonryfoamsandcoatings.com](http://www.masonryfoamsandcoatings.com)

